

Art.G90001



properties

installation : ideal for prewall applications(bacside wet wall, front dry wall) with the self supporting frame fixed to back wall and floor. may also be used in wet walls.

load resistance : 400 kg if assembled properly in wet wall.

working pressure range : 0,2-16 bar

fill duration : 39secs for 6 lt at 3 bars

flush volume : 3/6litre (can be adjusted between 2,5-4,5lt/ 4,5-9lt)

supply water connection : 1/2" M

bowl fixing bolt axes : 180mm or 230mm

insulation : moulded styrofoam against condensation and noise.

part list in box : protective channel, waste bend pipe set, wc connection set, installation manual, fixing set for brick and concrete.

stop valve for supply line : brass angle valve included in product

packaging dimensions : 140*840*620mm

weight : 15 kg


thickness : 12 - 18 cm

frame protection : frame coating- epoxy, leg coating - zinc.


product dimensions

in mm' s.

h is the average distance between bolt axis and finished floor surface. Correct distance should be adjusted referring to bowl technical manuel.

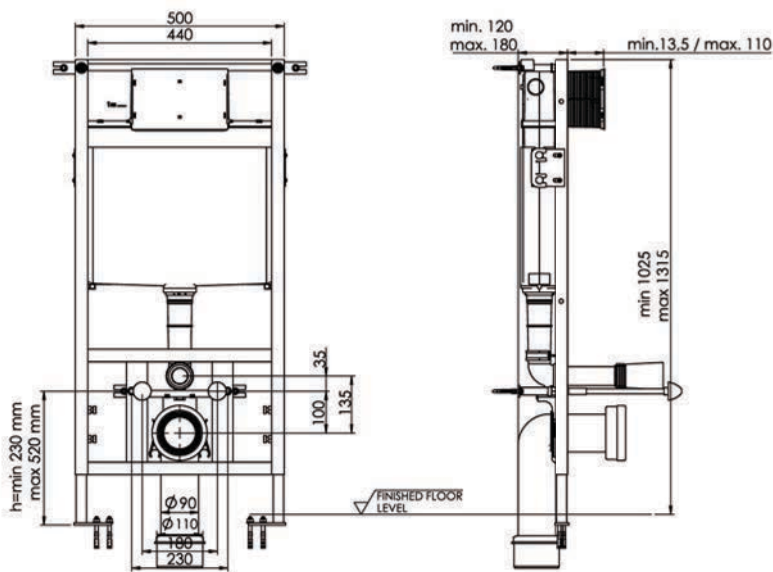

installation section

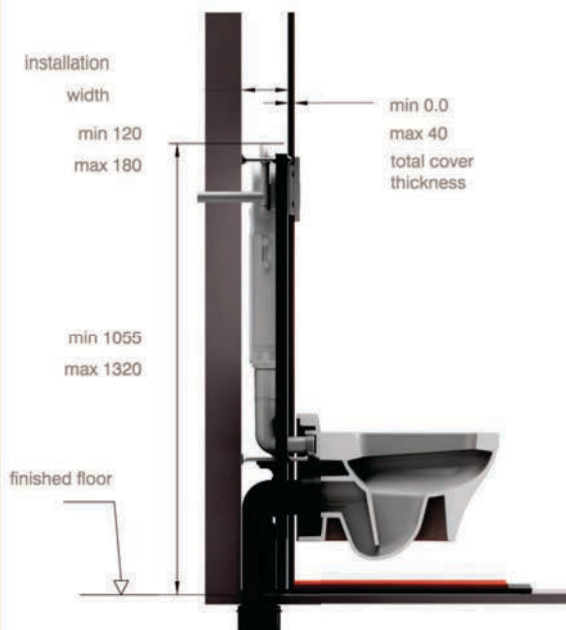

installation types



1

wall supporting application
into wet wall



2

wall supporting application
in wet wall



3

prewall self supporting
application for light wall



4

floor mounted self supporting
application for light walls